



## Shenzhen Retevis Technology Co., Ltd

7/F, 13-C, Zhonghaixin Science & Technology Park, No.12 Ganli 6th Road,  
Jihua Street, Longgang District, Shenzhen, China

Web: [www.retevis.com](http://www.retevis.com)


E-mail: [kam@retevis.com](mailto:kam@retevis.com)

Facebook: [facebook.com/retevis](https://www.facebook.com/retevis)



MADE IN CHINA

# RETEVIS

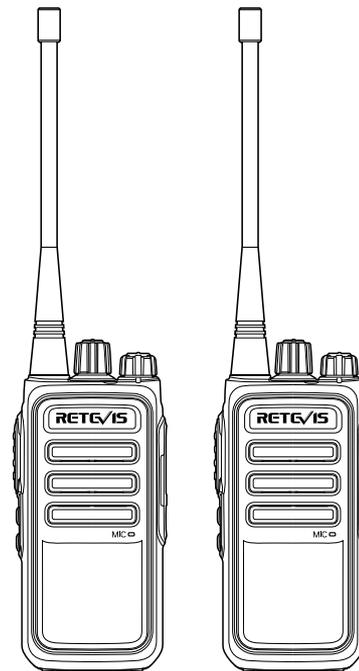

US

## RT66

Two Way Radio  
User's Manual

## Thank you!

We are grateful that you chose our two way radio.

We believe this Two Way Radio will provide dependable and reliable communication to personal operating at peak efficiency.

The transceivers incorporate the latest in advanced technology.

As a result, We feel strongly that you will be pleased with the quality and features of this product!

### Product safety and RF Exposure for Two Way Radio:



Before using this Two way radio, please read the manual which contains important operating instructions for safe usage, RF Energy Awareness, control information and operational instructions for compliance with RF Energy Exposure limits in applicablenational and international standards, and also read the operational instructions for safe use.

**CONTENT**

GETTING ACQUAINTED ..... 01

UNPACKING AND CHECKING EQUIPMENT ..... 02

    Packing List ..... 02

PREPARATION ..... 03

    Li-ion Battery Pack Precautions ..... 03

    Charging the Battery Pack ..... 04

BASIC OPERATION ..... 05

    Switch Power On/Off ..... 05

    Adjusting the Volume ..... 05

    Selecting a Channel ..... 05

    Transmitting & Receiving ..... 05

ADVANCED OPERATIONS ..... 06

    Wide/Narrow Bandwidth Selection ..... 06

    Time-Out Timer (TOT) ..... 06

    Battery Save ..... 06

    Channel Number Annunciation ..... 06

    Low Battery Alert ..... 07

    Comandor ..... 07

    Scrambler ..... 07

    CTCSS/DCS ..... 07

CARE AND CLEANING ..... 08



TROUBLESHOOTING GUIDE ..... 09

    CTCSS/DCS ..... 10

CHANNEL AND FREQUENCIES ..... 11

WARNING ..... 12

**GETTING ACQUAINTED**

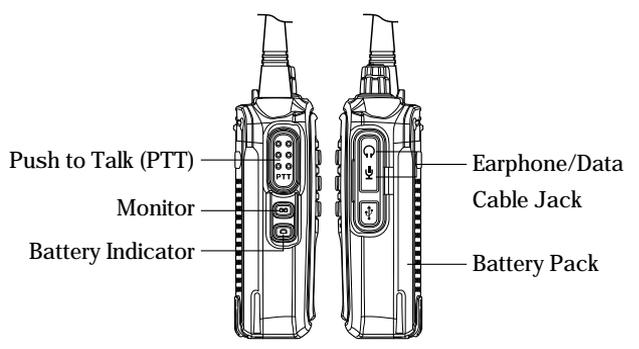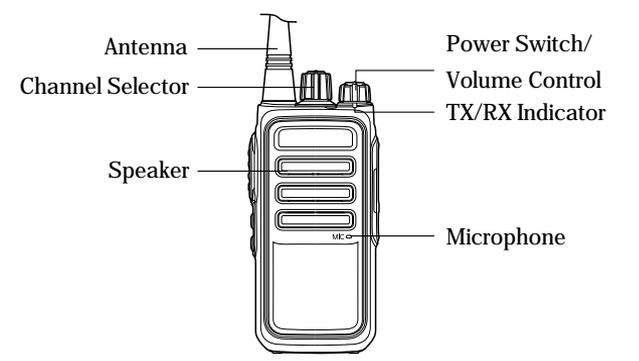

**UNPACKING AND CHECKING EQUIPMENT**

Carefully unpack the transceiver. We recommend that you identify the items listed in the following table before discarding the packing material. If any items are missing or have been damaged during shipment, file a claim with the carrier immediately.

**Packing List**

DESCRIPTION	QUANTITY
Unit Transceiver	2
Battery Pack	2
Desktop Charger	2
Belt Clip	2
Hand Strap	2
User Manual	1

**PREPARATION**

**Li-ion Battery Pack Precautions**

- Do not short the battery terminals or dispose of the battery by fire. Never attempt to remove the casing from the battery pack.
- Keep the charging temperature always between 5\* and 40\*.
- Do not use the transceiver while charging the battery pack. We recommend you switch the transceiver power OFF while charging is taking place.
- Do not recharge the battery pack if it is already fully charged. Doing so may cause the life of the battery pack to shorten or the battery pack may be damaged.
- Use the battery pack only for its intended purpose. Never use any charger or battery pack that is damaged.
- Do not short-circuit the battery. Accidental short-circuiting can occur when a metallic object such as a coin, clip, or pen causes direct connection of the positive (+) and negative (-) terminals of the battery. This might happen, for example, when you carry a spare battery pack in your pocket or purse. Short-circuiting the terminals may damage the battery or the connecting object.

### Charging the Battery Pack

The battery pack is not charged at the factory, please charge it before use. Initially charging the battery pack after purchase or extended storage (greater than 2 months) will not bring the battery pack to its normal operating capacity. After two or three complete charge and discharge cycles. The full performance of battery will be achieved.

1. Slide the battery pack or transceiver with a battery pack into the desktop charger.
2. Make sure the battery pack contacts are in contact with the charging terminals.
3. The charging LED lights red and charging begins.
4. After charging about 4 hours, when the light turns to green, it means the battery pack is fully charged.
5. Then you can take off the battery pack or transceiver with the battery pack and use it.

### Switch Power On/Off

1. Turn On: turn the [Power] switch clockwise to switch the transceiver ON, an alert tone will be heard.
2. Turn Off: turn the [Power] switch counter clockwise to switch the transceiver OFF.

### Adjusting the Volume

Rotate the [Volume] control to adjust the volume. Clockwise increases the volume and counter clockwise decreases it.

### Selecting a Channel

Rotate the [Channel Selector] to choose your desired channel. Clockwise increases the number and counter clockwise decreases it. If the channel number annunciation is activated, the radio will announce the current corresponding channel number. If none channel has been programmed, it cannot be used. When a non-programmed channel is selected, the LED indicator lights orange and an alert tone sounds.

### Transmitting & Receiving

1. Press the [PTT] switch and speak into the microphone in your normal speaking voice, for best sound quality at the receiving station, hold the microphone approximately 1~2 inches (2.5~5 cm) from your mouth.
2. Release the [PTT] switch to receive.

## ADVANCED OPERATIONS

## Wide/Narrow Bandwidth Selection

You can select Wide/Narrow bandwidth via programming software, the default setting is Wide.

## Time-Out Timer (TOT)

The Time-Out Timer is used to prevent any caller from using a channel for an extended period of time (OFF, 15~600 seconds). If you continuously transmit for a period of time that exceeds the programmed time, the transceiver will stop transmitting and an alert tone will sound. To stop the tone, release the PTT switch.

## Battery Save

The battery save function decreases the amount of power used when signal is not being received and no operations are being performed (no keys are being pressed and no switches are being turned) for 5 seconds, the battery save function activates.

When a signal is received or an operation is performed, battery save is disabled. The default setting is ON.

## Channel Number Annunciation

Your dealer may have programmed channel number annunciation on your transceiver. There are 3 kinds of the channel number annunciation: "Chinese Male Voice, English Male Voice (Default Setting), None". When you turn the [Channel Selector], the transceiver sounds the current corresponding channel number.

## ADVANCED OPERATIONS

## Low Battery Alert

For extra convenience, if the battery level runs low, the transceiver will sounds "do do do" at every 5 seconds, to alert the user to recharge the battery. Please change new battery pack or charge this battery pack.

## Compandor

Activate this function for more clear audio output. The default setting is OFF.

## Scrambler

There are 8 groups of scramblers to select, when activated, any other party listening on your channel is prevented from eavesdropping your conversation. The default setting is OFF.

## CTCSS/DCS

There are 50 CTCSS 105 DCS for selection, you can also define your own CTCSS/DCS, or activate the DCS hopping feature, the CTCSS/DCS is a sub-audible tone/code which allows you to ignore (not hear) calls from other parties who are using the same channel, when a channel is set up with a CTCSS/DCS, squelch will only open when a call containing a matching tone or code is received. Meanwhile, signals that you transmit will only be heard by parties whose CTCSS/DCS signaling matches your transceiver.

**CARE AND CLEANING**

To guarantee optimal performance as well as a long service life of your radio, please follow the tips below.

- Keep your radio dry. Rain, moisture and liquid or water may contain mineral substance that can corrode the electronic circuit.
- Take out the battery when the radio is wet, install the battery pack when it is completely dry.
- Keep away the radio from hot place. High temperature may cause electrical instrument working life shorten, battery pack damaged and plastic component deformation or dissolved.
- Do not throw, knock or shock the radio. Use it rudely may damage internal circuit board and accurate structure.
- Do not use any strong chemicals, cleaner or detergent to clean the radio.
- Do not paint the radio. Painting may block the demountable component to influence normal operation.
- Do not hold the radio by its antenna or headset cable directly.
- Use supplied or approved antenna when change antenna. Unapproved antenna, modified accessories may damage the radio and violate the relevant rules.
- Attach the accessory jack cover when the radio is not in use.
- Make a back-up copy (like frequencies and channels.) before you take your radio to service center.

Note : Every tip above are all applicable for your radio, battery pack, desktop charger and accessories. Consult your dealer or take your radio to nearest service center if any parts cannot work normally.

**TROUBLESHOOTING GUIDE**

PROBLEM	SOLUTION
No power.	<ul style="list-style-type: none"> <li>• The battery pack may be dead. Recharge or replace the battery pack.</li> <li>• The battery pack may not be installed correctly. Remove the battery pack and install it again.</li> </ul>
Battery power dies shortly after charging.	<ul style="list-style-type: none"> <li>• The battery pack life is finished. Replace the battery pack with a new one.</li> </ul>
Cannot talk to or hear other members in your group.	<ul style="list-style-type: none"> <li>• Make sure you are using the same frequency and CTCSS/DCS as the other members in your group.</li> <li>• Other group members may be too far away. Make sure you are within range of the other transceivers.</li> </ul>
Other voices (besides group members) are present on the channel.	<ul style="list-style-type: none"> <li>• Change the CTCSS/DCS setting. Be sure to change the tone on all transceiver in your group.</li> </ul>

**CTCSS Standard Frequency Table**

1 - 67.0	11 - 94.8	21 - 131.8	31 - 171.3	41 - 203.5
2 - 69.3	12 - 97.4	22 - 136.5	32 - 173.8	42 - 206.5
3 - 71.9	13 - 100.0	23 - 141.3	33 - 177.3	43 - 210.7
4 - 74.4	14 - 103.5	24 - 146.2	34 - 179.9	44 - 218.1
5 - 77.0	15 - 107.2	25 - 151.4	35 - 183.5	45 - 225.7
6 - 79.7	16 - 110.9	26 - 156.7	36 - 186.2	46 - 229.1
7 - 82.5	17 - 114.8	27 - 159.8	37 - 189.9	47 - 233.6
8 - 85.4	18 - 118.8	28 - 162.2	38 - 192.8	48 - 241.8
9 - 88.5	19 - 123.0	29 - 165.5	39 - 196.6	49 - 250.3
10 - 91.5	20 - 127.3	30 - 167.9	40 - 199.5	50 - 254.1

**DCS Standard Group Number**

023	071	143	225	266	356	452	532	664
025	072	145	226	271	364	454	546	703
026	073	152	243	274	365	455	565	712
031	074	155	244	306	371	462	606	723
032	114	156	245	311	411	464	612	731
036	115	162	246	315	412	465	624	732
043	116	165	251	325	413	466	627	734
047	122	172	252	331	423	503	631	743
051	125	174	255	332	431	506	632	754
053	131	205	261	343	432	516	645	
054	132	212	263	346	445	523	654	
065	134	223	265	351	446	526	662	

CHANNEL	FREQUENCY	CTCSS/DCS	POWER
1	462.5625	67.0	High
2	462.5875	118.8	High
3	462.6125	127.3	High
4	462.6375	131.8	High
5	462.6625	136.5	High
6	462.6250	127.3	High
7	462.7250	136.5	High
8	462.6875	141.3	High
9	462.7125	146.2	High
10	462.5500	123.0	High
11	462.5750	D7431	High
12	462.6000	D3321	High
13	462.6500	D2431	High
14	462.6750	D606N	High
15	462.7000	D731I	High
16	462.7250	D462I	High

## RF ENERGY EXPOSURE AND PRODUCT SAFETY GUIDE FOR PORTABLE TWO-WAY RADIOS



Before using this radio, read this guide which contains important operating instructions for safe usage and RF energy awareness and control for compliance with applicable standards and regulations.

This two-way radio uses electromagnetic energy in the radio frequency (RF) spectrum to provide communications between two or more users over a distance. RF energy, which when used improperly, can cause biological damage.

All Retevis two-way radios are designed, manufactured, and tested to ensure they meet government-established RF exposure levels. In addition, manufacturers also recommend specific operating instructions to users of two-way radios. These instructions are important because they inform users about RF energy exposure and provide simple procedures on how to control it.

Please refer to the following websites for more information on what RF energy exposure is and how to control your exposure to assure compliance with established RF exposure limits:

<http://www.who.int/en/>

### Local Government Regulations

When two-way radios are used as a consequence of employment, the Local Government Regulations requires users to be fully aware of and able to control their exposure to meet occupational requirements.

Exposure awareness can be facilitated by the use of a product label directing users to specific user awareness information. Your Retevis two-way radio has a RF Exposure Product Label. Also, your Retevis user manual, or separate safety booklet includes information and operating instructions required to control your RF exposure and to satisfy compliance requirements.

### Radio License

Governments keep the radios in classification, business two-way radios operate on radio frequencies that are regulated by the local radio management departments (FCC). To transmit on these frequencies, you are required to have a license issued by them. The detailed classification and the use of your two radios, please contact the local government radio management departments. Use of this radio outside the country where it was intended to be distributed is subject to government regulations and may be prohibited.

### Unauthorized modification and adjustment

Changes or modifications not expressly approved by the party responsible for compliance may void the user's authority granted by the local government radio management departments to operate this radio and should not be made. To comply with the corresponding requirements, transmitter adjustments should be made only by or under the supervision of a person certified as technically qualified to perform transmitter maintenance and repairs in the private land mobile and fixed services as certified by an organization representative of the user of those services.

## WARNING

Replacement of any transmitter component (crystal, semiconductor, etc.) not authorized by the local government radio management departments equipment authorization for this radio could violate the rules.

## FCC Requirements:

This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(Licensed radios are applicable);

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (Other devices are applicable)

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

## WARNING

## RF Exposure Information

- DO NOT operate the radio without a proper antenna attached, as this may damage the radio and may also cause you to exceed RF exposure limits. A proper antenna is the antenna supplied with this radio by the manufacturer or an antenna specifically authorized by the manufacturer for use with this radio, and the antenna gain shall not exceed the specified gain by the manufacturer declared.
- DO NOT transmit for more than 50% of total radio use time, more than 50% of the time can cause RF exposure compliance requirements to be exceeded.
- During transmissions, your radio generates RF energy that can possibly cause interference with other devices or systems. To avoid such interference, turn off the radio in areas where signs are posted to do so.
- DO NOT operate the transmitter in areas that are sensitive to electromagnetic radiation such as hospitals, aircraft, and blasting sites.
- Portable Device, this transmitter may operate with the antenna (s) documented in this filing in Push-to-Talk and body-worn configurations. RF exposure compliance is limited to the specific belt-clip and accessory configurations as documented in this filing and the separation distance between user and the device or its antenna shall be at least 2.5 cm.
- Mobile Device, during operation, the separation distance between user and the antenna subjects to actual regulations, this separation

**WARNING**

distance will ensure that there is sufficient distance from a properly installed externally-mounted antenna to satisfy the RF exposure requirements.

- Occupational/Controlled Radio, this radio is designed for and classified as "Occupational/Controlled Use Only", meaning it must be used only during the course of employment by individuals aware of the hazards, and the ways to minimize such hazards; NOT intended for use in a General population/uncontrolled environment.
- General population/uncontrolled Radio, this radio is designed for and classified as "General population/uncontrolled Use".

**RF Exposure Compliance and Control Guidelines and Operating Instructions**

To control your exposure and ensure compliance with the occupational/controlled environment exposure limits, always adhere to the following procedures.

**Guidelines:**

- User awareness instructions should accompany the device when transferred to other users.
- Do not use this device if the operational requirements described herein are not met.

**Operating Instructions:**

- Transmit no more than the rated duty factor of 50% of the time. To Transmit (Talk), push the Push to Talk (PTT) button. To receive calls (listen), release the PTT button. Transmitting 50% of the time,

**WARNING**

or less, is important because the radio generates measurable RF energy exposure only when transmitting in terms of measuring for standards compliance.

- Transmit only when people outside the vehicle are at least the recommended minimum lateral distance away from a properly installed according to installation instructions, externally mounted antenna.
- When operating in front of the face, worn on the body, always place the radio in a Retevis approved clip, holder, holster, case, or body harness for this product. Using approved body-worn accessories is important because the use of Non-Retevis approved accessories may result in exposure levels, which exceed the IEEE/ICNIRP RF exposure limits.

**Hand-held Mode**

- Hold the radio in a vertical position with the microphone (and other parts of the radio including the antenna) at least 2.5 cm (one inch) away from the nose or lips. The antenna should be kept away from the eyes. Keeping the radio at a proper distance is important as RF exposure decreases with increasing distance from the antenna.



**Phone Mode**

- When placing or receiving a phone call, hold your radio product as you would a wireless telephone. Speak directly into the microphone.

**WARNING**

**Electromagnetic Interference/Compatibility**

NOTE: Nearly every electronic device is susceptible to electromagnetic interference (EMI) if inadequately shielded, designed, or otherwise configured for electromagnetic compatibility.

**Avoid Choking Hazard**



Small Parts. Not for children under 12 years.

Turn off your radio power in the following conditions:

- Turn off your radio before removing (installing) a battery or accessory or when charging battery.
- Turn off your radio when you are in a potentially hazardous environments: Near electrical blasting caps, in a blasting area, in explosive atmospheres (inflammable gas, dust particles, metallic powders, grain powders, etc.).
- Turn off your radio while taking on fuel or while parked at gasoline service stations.



**WARNING**

To avoid electromagnetic interference and/or compatibility conflicts.

- Turn off your radio in any facility where posted notices instruct you to do so, hospitals or health care facilities (Pacemakers, Hearing Aids and Other Medical Devices) may be using equipment that is sensitive to external RF energy.
- Turn off your radio when on board an aircraft. Any use of a radio must be in accordance with applicable regulations per airline crew instructions.

**WARNING**

Protect your hearing:

- Use the lowest volume necessary to do your job.
- Turn up the volume only if you are in noisy surroundings.
- Turn down the volume before adding headset or earpiece.
- Limit the amount of time you use headsets or earpieces at high volume.



**WARNING**

- When using the radio without a headset or earpiece, do not place the radio's speaker directly against your ear.
- Use careful with the earphone maybe possible excessive sound pressure from earphones and headphones can cause hearing loss

Note: Exposure to loud noises from any source for extended periods of time may temporarily or permanently affect your hearing. The louder the radio's volume, the less time is required before your hearing could be affected. Hearing damage from loud noise is sometimes undetectable at first and can have a cumulative effect.



**Avoid Burns**

**Antennas**

- Do not use any portable radio that has a damaged antenna. If a damaged antenna comes into contact with the skin when the radio is in use, a minor burn can result.



**WARNING**

**Batteries (If appropriate)**

- When the conductive material such as jewelry, keys or chains touch exposed terminals of the batteries, may

## WARNING

complete an electrical circuit (short circuit the battery) and become hot to cause bodily injury such as burns.

Exercise care in handling any battery, particularly when placing it inside a pocket, purse or other container with metal objects.

Long transmission

- When the transceiver is used for long transmissions, the radiator and chassis will become hot.

## Safety Operation

Forbid

- Do not use charger outdoors or in moist environments, use only in dry locations/conditions.
- Do not disassemble the charger, that may result in risk of electrical shock or fire.
- Do not operate the charger if it has been broken or damaged in any way.
- Do not place a portable radio in the area over an air bag or in the air bag deployment area. The radio may be propelled with great force and cause serious injury to occupants of the vehicle when the air bag inflates.

To reduce risk

- Pull by the plug rather than the cord when disconnecting the charger.
- Unplug the charger from the AC outlet before attempting any maintenance or cleaning.



## WARNING

- Contact Retevis for assistance regarding repairs and service.
- The adapter shall be installed near the equipment and shall be easily accessible.

## Approved Accessories

- This radio meets the RF exposure guidelines when used with the Retevis accessories supplied or designated for the product. Use of other accessories may not ensure compliance with the RF exposure guidelines and may violate regulations.



- For a list of Retevis-approved accessories for your radio model, visit the following website:  
<http://www.Retevis.com>

## Warranty Card

Product model: \_\_\_\_\_ Date of purchase: \_\_\_\_\_

Serial Number: \_\_\_\_\_

Seller: \_\_\_\_\_ contact number: \_\_\_\_\_

Username: \_\_\_\_\_ contact number: \_\_\_\_\_

Address: \_\_\_\_\_ Zip code: \_\_\_\_\_

### Warranty description:

1. The warranty card is saved by the customer as the warranty certificate, and the loss is not compensated.
2. This card must be stamped and dated for sale to take effect.
3. This card must not be altered. Please confirm that the warranty card serial number matches the purchase machine number, otherwise it will be invalid.
4. The warranty period is one year. Chargers, batteries, headphones, antennas and feeders are consumables, not covered by warranty.
5. Users can choose the following ways to get repair service:
  - a. At the original purchase office.
  - b. Our company is in the local special maintenance point.