



Feature

/ Squelch level

/ Monitor / Time-out Timer

/ Scan / CTCSS&DCS

/ Scrambler / Battery save Mode

/ VOX / Battery Voltage Prompt


/ Alarm

/ High/Middle/Low output Power

Technical specification

Frequency Range	400-480MHz
Channel Number	16
Output power	10W
Working voltage	7.4V DC
Battery capacity	3200mAh(Li-ion)
Dimension(with battery, without antenna)	151x58x38mm(5.9x2.3x1.5in)
Weight(With battery&antenna)	335g(11.8oz)
Audio distortion	<5%
Frequency stability	±2.5ppm
Max frequency deviation	≤2.5KHz
Spurious emission	≤7uW
Modulation mode	11KΦF3E
Reference sensibility	≤0.3uV
Squelch on sensibility	≤0.25uV
Adjacent channel selectivity	≥65dB
Spurious response	≥55dB
International	≥60dB
Current	≤1.5A

Standard Accessories

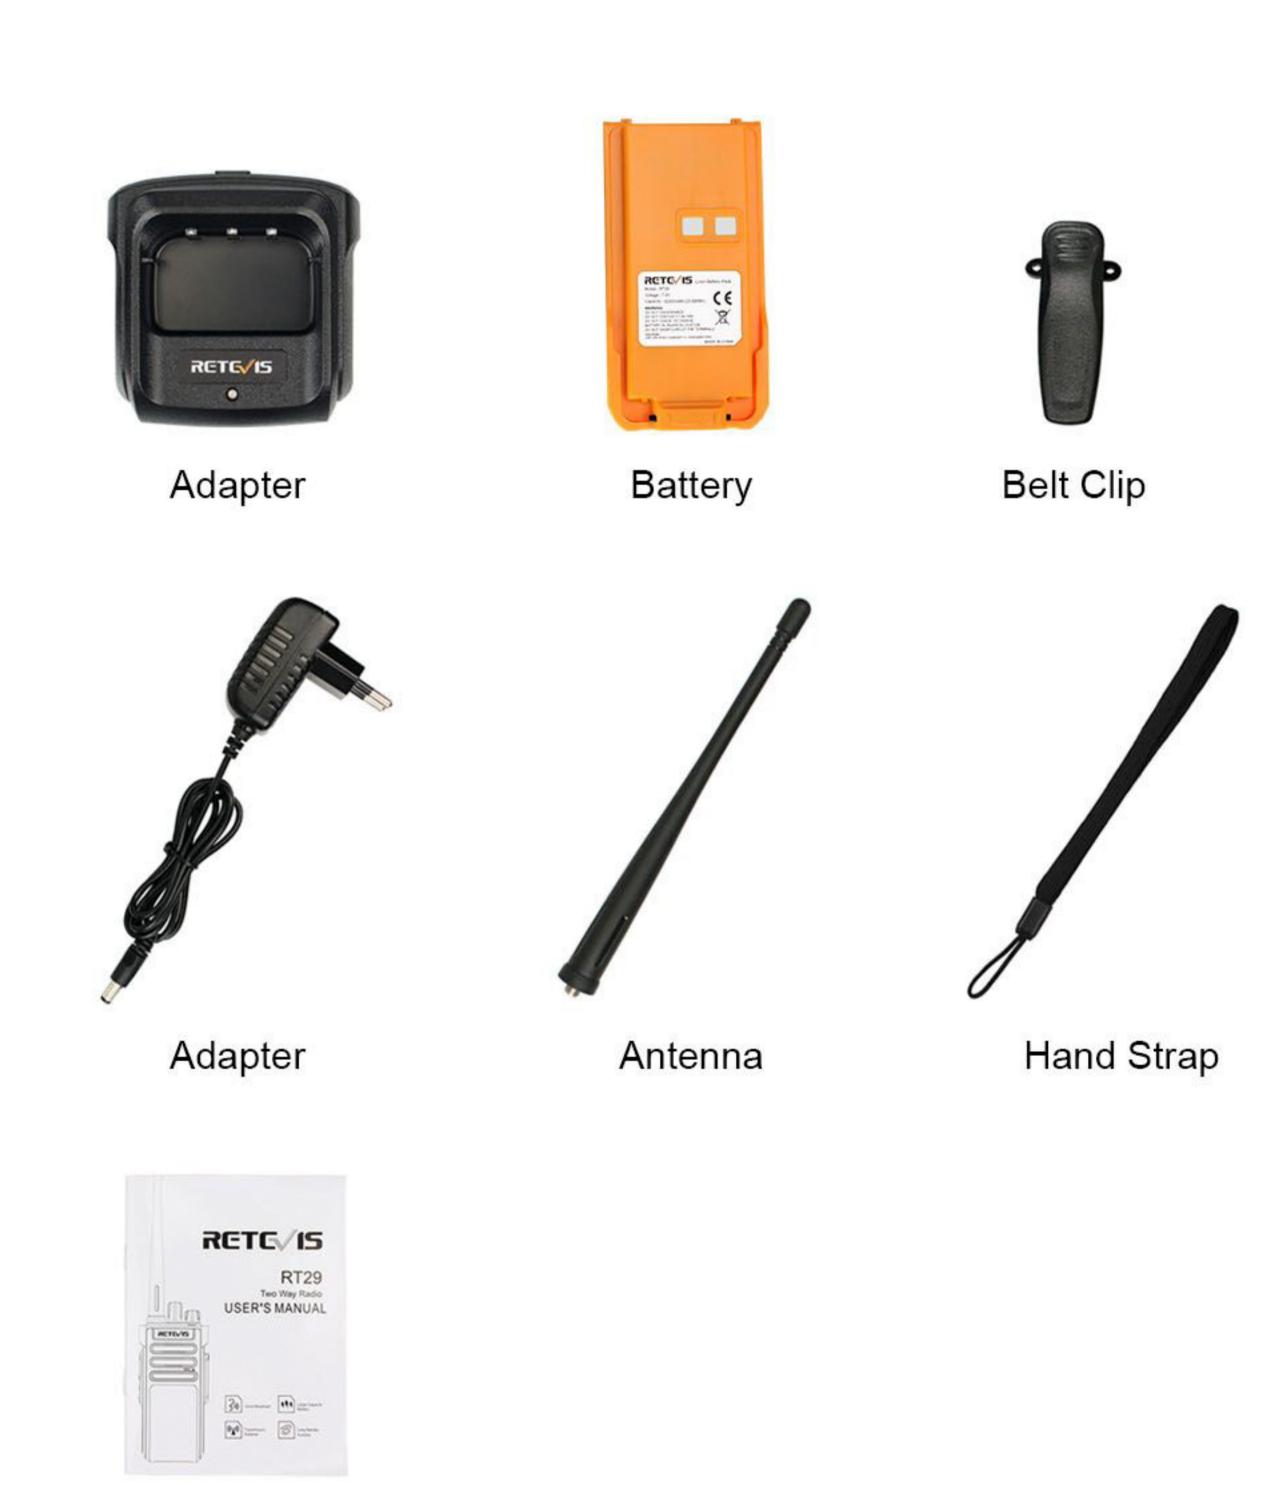



Shenzhen Retevis Technology Co.,Ltd.

www.retevis.com

User Manual

- @ kam@retevis.com
- facebook.com/retevis